


E2xL15 PA Loudspeakers


The hazardous area E2xL15 PA loudspeaker is ATEX certified for Zone 2 applications and also UL approved for Class I Div 2 applications.

The E2xL15 is available with either a 70V or 100V line transformer or as a low impedance loudspeaker.

The E2x range features enclosures manufactured from lightweight, corrosion proof PPS and high impact, fire retardant ABS re-entrant flare horns; both of which are suitable for the harshest of environments.

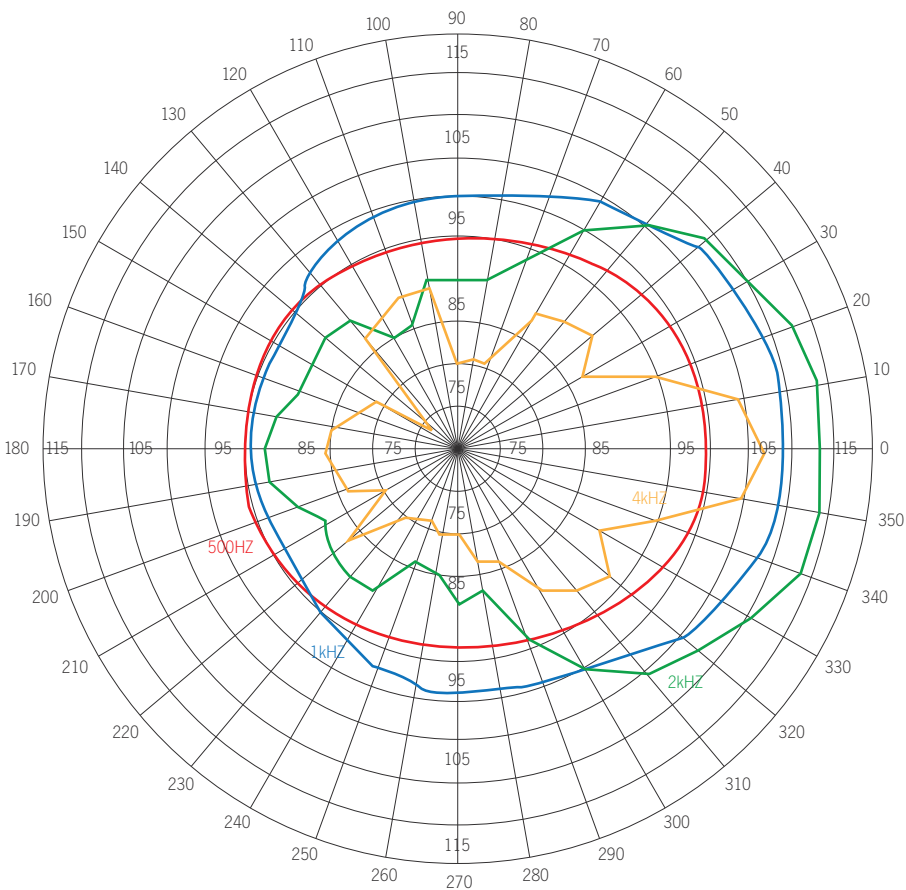

Part codes:		
Part Code:	Classification:	
ATEX version:		
E2xL15EG**	II 3G EEx nA IIC T4 (Tamb -20°C to +55°C)	
UL version:		
E2xL15UL**	Class I, Div 2, Grps A,B,C,D T4 (135°C) at +55°C Class I, Div 2, Grps A,B,C,D T4A (120°C) at +40°C Class II, Div 2, Grps F & G T6 (85°C) at +55°C Class III, Div 1, T6 (85°C) at +40°C	
** = Type reference:		
Options:	70V	70V Line transformer
	100V	100V Line transformer
	8R	8 Ohm low impedance
	16R	16 Ohm low impedance
e.g: E2xL15UL100V		

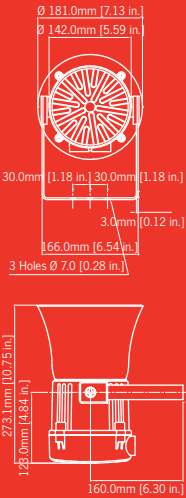

Specification:	
SPL:	108dB +/-3dB @ 1w @ 1m (Pink) 118dB +/-3dB @ 15w @ 1m (Rated)
Rated power:	15 Watts RMS
70v line tapings:	15w / 7.5w / 3w / 1w (z=336.67 Ohms / 653.33 Ohms / 1.6k Ohms / 4.9k Ohms)
100v line tapings:	15w / 7.5w / 3w / 1w (z=666.87 Ohms / 1.34k Ohms / 3.34k Ohms / 10k Ohms)
Low impedance:	8 Ohm (I/P: 10.95V) or 16 Ohm (I/P: 15.49V)
Dispersion:	120° @ 1kHz & 32° @ 4kHz
Frequency range:	400Hz to 8000 Hz
DC Line monitoring:	2.2µF Capacitor (Transformer)
Ingress protection:	ATEX: IP66 & IP67 UL: Type 4, 4X & 13
Housing material:	UL94V0 PPS & ABS
ATEX cable entries:	2 x M20 ISO cable entries - with 1 blanking plug.
UL cable entries:	1 x 1/2"NPT cable entry
Terminals (ATEX):	0.5 to 4.0mm² - In & Out
Weight :	Low impedance: 2.5kg Transformer: 3.00kg
*SPL data +/-3dB(A). Measured at optimum voltage.	

- Features:**
- Very large termination area.
 - Ratchet adjustable stainless steel 'U' bracket.
 - Transformer type fitted with thermal fuse
 - Complies with BS5839 part 8
- Approvals:**
- ATEX certificate: DEMKO 06 ATEX 0421554, EN 50021: 1999
 - UL File ref: E230764

