

TECHNICAL DATASHEET



iANT 214



Directional simple apparatus Wi-Fi antenna.

Safe to use in hazardous areas when connected to an intrinsically safe RF output, such as the iWAP series or other solutions using the iSOLATE501

Optimised for use in 2.4/5.8GHz WLAN installations or wireless mesh Ethernet networks

Ideal for point-to-point applications

Assessed by
Extronics
engineers as
simple apparatus

Vertically
polarised or dual
slant (2x2 MIMO)


Rugged with
wide temperature
range - use
indoors or
outdoors

Directional
coverage with up
to 8.5 / 14 dBi

Supplied with
aluminium
mounting
bracket


Easy to install,
no specialist
tools needed

2.4GHz horizontal plane: copolar

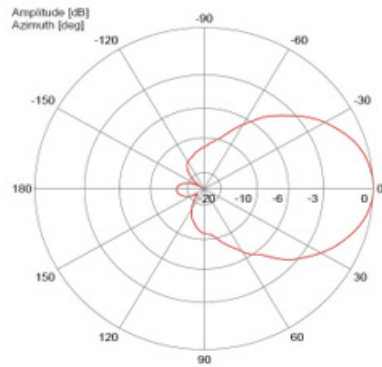


— Horizontal-Plane: Copolar

2.4GHz vertical plane: copolar

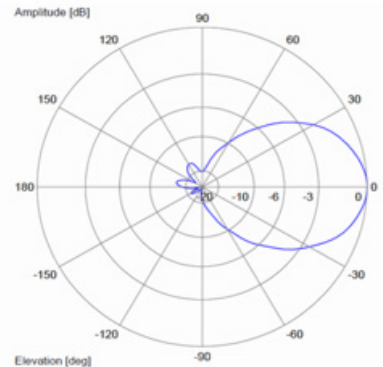


— Vertical-Plane: Copolar

2.4GHz horizontal plane +/- 45°:

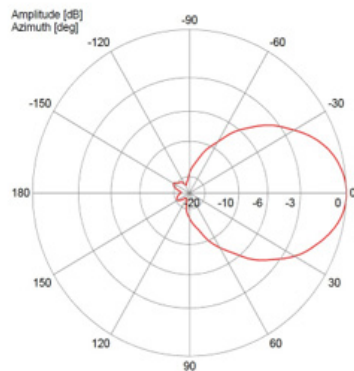


— Horizontal-Plane: Copolar

2.4GHz vertical plane +/- 45°: copolar

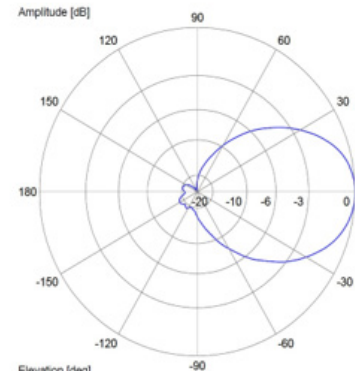


— Vertical-Plane: Copolar

5.75GHz horizontal plane: copolar

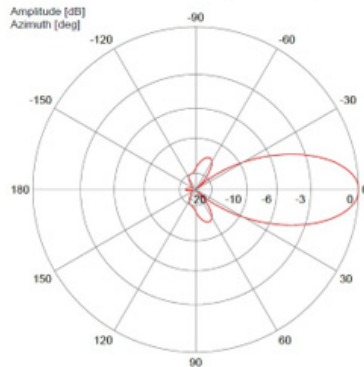


— Horizontal-Plane: Copolar

5.75GHz vertical plane: copolar

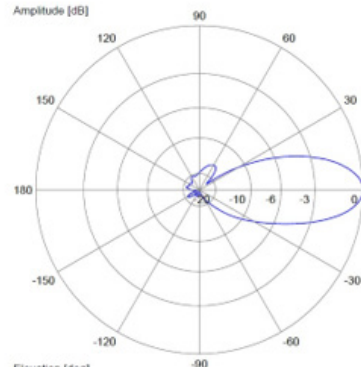


— Vertical-Plane: Copolar

S-Parameter (2.4GHz)

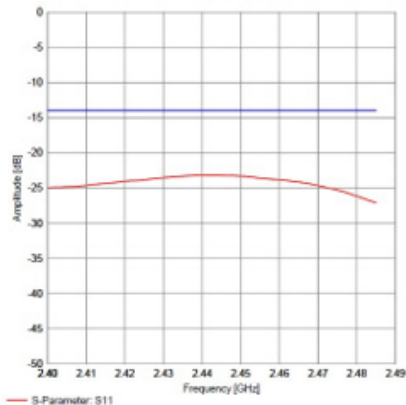

— S-Parameter: S11

S-Parameter (5.75GHz)

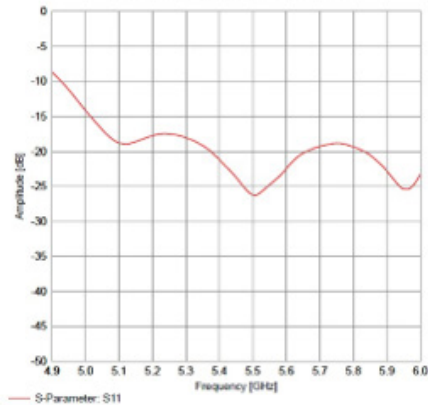

— S-Parameter: S11

SPECIFICATION



	iANT214-2400	iANT214-2400D	iANT214-5000
Frequency band	2400-2485 MHz	2400-2485 MHz	5150-5975 MHz
Gain	8.5 dBi	8 dBi	14 dBi
Polarisation	Vertical	+/- 45° slant (2x2 MIMO)	Vertical
Horizontal 3dB beam width	75°	75°	40°
Vertical 3dB beam width	75°	70°	35°
Front to back ratio	12 dB	14 dB	20 dB
Isolation between port	-	25 dB	-
RF connection	N, jack (female)	2 x SMA, jack (female)	N, jack (female)
	All variants:		
VSWR	1.5		
DC grounded	Yes		
Windload	Frontal 15 N at 160km/h		
Nominal impedance	50 Ohms		
Radome material	UV stabilised polycarbonate		
Flammability	UL94-V0		
Ingress protection	IP67		
Temperature	-40°C to +80°C (operating and storage)		
Composite power max	10W @ 25°C		
Dimensions	H101 x W80 x D35 mm		
Weight	110 g		
RF connections	Includes 3 x RG316 cables with N-male connectors (800mm approx. length)		
Vibration	According to IEC 60721-3-4		
Mounting	Supplied with aluminium wall mount bracket		

ORDERING INFORMATION

iANT214-2400
iANT214-2400D
iANT214-2400

iANT214 directional antenna 2400MHz
iANT214 directional antenna 2400MHz dual slant (2x2 MIMO)
iANT214 directional antenna 5000MHz

www.extronics.com | info@extronics.com | +44 (0) 845 277 5000

403444(4)

Disclaimer: Copyright (c) Extronics Ltd. The information contained in this document is subject to change without notice. Extronics cannot be held responsible for any errors or inaccuracies within this document.

Extronics Released