

XPP-5422GX

X-Series Intrinsically Safe Dual-Light™ Flashlight

MARKET APPLICATIONS

Hazardous work environments, industrial, automotive, law enforcement, fire & rescue

DESCRIPTION

This Dual-Light™ Flashlight is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5422GX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. A 130 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. Power comes from 3 AA premium batteries (not included).

CASE MATERIAL

Engineered Polymer - Green

DIMENSIONS

Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)

WEIGHT

Weight: 6.9 oz. (196 g) with batteries installed

LENS

Unbreakable polycarbonate with scratch resistant coating

LIGHT SOURCE

Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime

LIGHT OUTPUT

Flashlight: 210 lumens, Floodlight: 130 lumens, Dual-Light: 285 lumens

ON/OFF

Dual Body Switch - Momentary or Constant-on Flashlight, Constant-on Floodlight

RUN-TIME


Flashlight: 14 hours, Floodlight: 20 hours, Dual-Light: 10 hours

BATTERY

3 Alkaline AA batteries (not included)

FEATURES

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible
- Flashlight – Floodlight – Dual-light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Dustproof / Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip & removable lanyard
- Requires 3 AA batteries

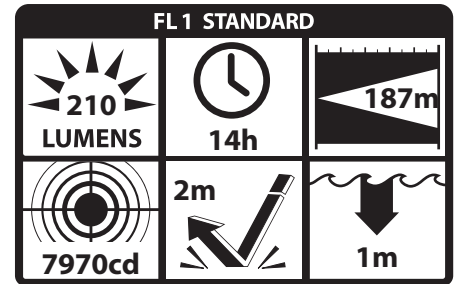


WARRANTY

Limited Lifetime Warranty

APPROVALS



XPP-5422GX PERFORMANCE CURVE

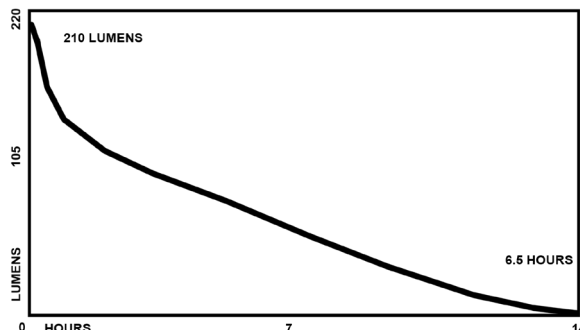

Bayco Products, Inc. XPP-5422GX
 640 S. Sanden Blvd.
 Wylie, TX 75098



Intertek



0359



ID 4003544
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia op is IIC T3 Ga
 CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27837X
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 16.0067X
 Ⓢ I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C
 Ⓢ II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AA Alkaline

Conforms to:
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-XPP-5422GX-18