


### iANT2xx Antenna Variants – Frequency Ranges Covered

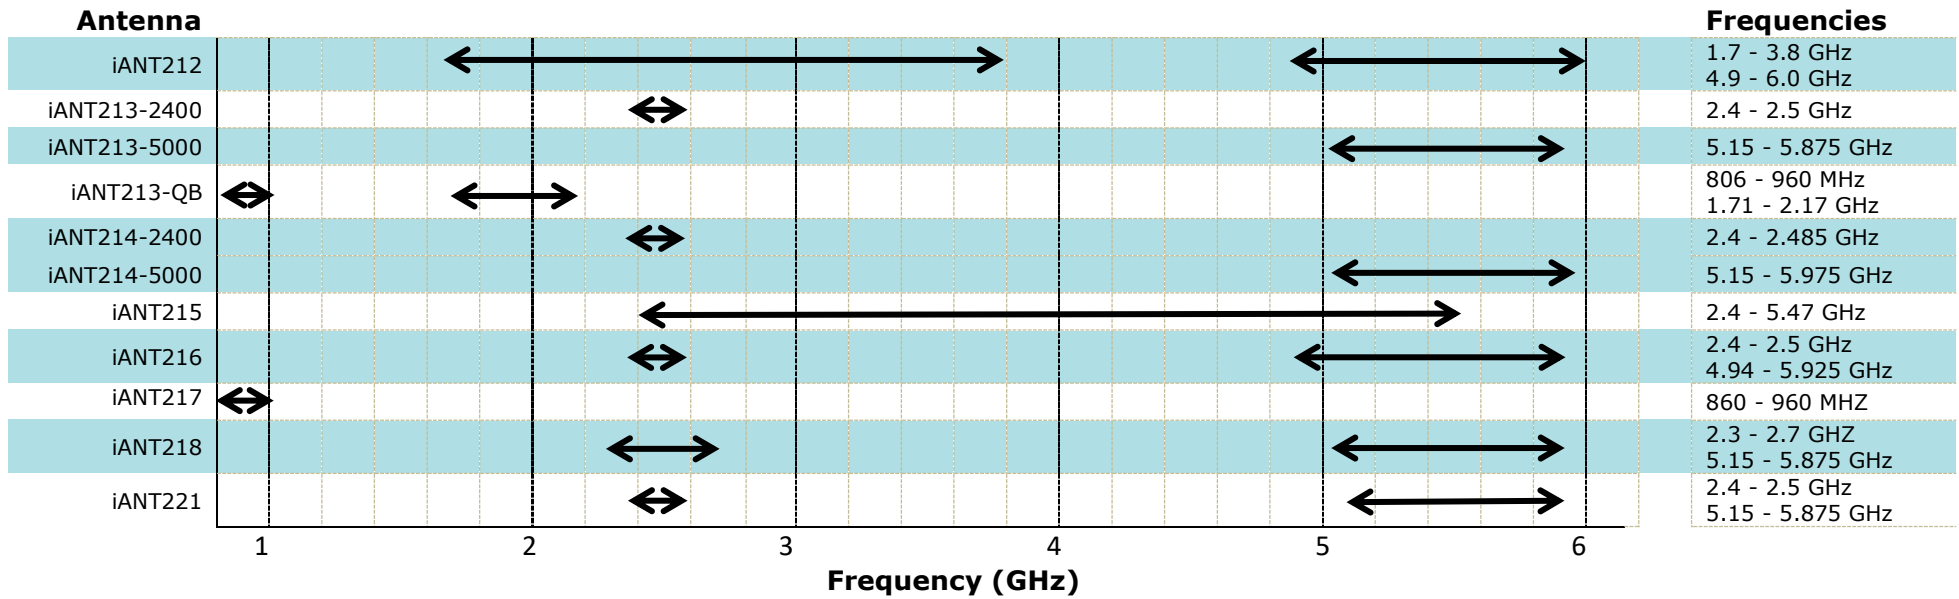

**Extronics Limited**

1 Dalton Way, Midpoint 18, Middlewich, Cheshire, UK. CW10 0HU

Tel: +44 (0) 845 277 5000 Fax: +44 (0)845 277 4000 E-mail: info@extronics.com Web: [www.extronics.com](http://www.extronics.com)

IANTxxx	Frequency L	Frequency H	IP rating	Op. Temp °C	Gain	Type	Connector
212	1.7-3.8	4.9-6	IP68	-40-85	1.5 - 2.5	Omni	N-type male
213-2400	2.4	2.5	IP67	-55-85	6	Omni	N-type female
213-5000	5.15	5.875	IP67	-45-70	5	Omni	N-type female
213-QB	0.806-0.96	1.71-2.17	IP67	-45-71	4 - 5	Omni	N-type female
214-2400	2.4	2.485	IP67	-40-80	8	Directional	N-type female
214-5000	5.15	5.975	IP67	-40-80	14	Omni	N-type female
215	2.4	5.47	IP68	-40-80	6 - 8	Omni	N-type female
216	2.4-2.5	4.94-5.925	IP67	-40-80	6	Omni	N-type male
217	0.86	0.96	IP66	-20-70	7	Omni	N-type female
218	2.3-2.7	4.9-6.1	IP67	-40-70	5	MIMO	N-type male
221	2.4-2.5	5.15-5.875	IP67	-40-70	7.5	MIMO	N-type male



**Extronics Limited**

1 Dalton Way, Midpoint 18, Middlewich, Cheshire, UK. CW10 0HU

**Tel:** +44 (0) 845 277 5000 **Fax:** +44 (0)845 277 4000 **E-mail:** info@extronics.com **Web:** [www.extronics.com](http://www.extronics.com)